

A general Bayes weibull inference model for accelerated life testing

J. René Van Dorp, Thomas A. Mazzuchi*

*Department of Engineering Management and Systems Engineering
The George Washington University, Washington D.C. 20052 USA*

Abstract

This article presents the development of a general Bayes inference model for accelerated life testing. The failure times at a constant stress level are assumed to belong to a Weibull distribution, but the specification of strict adherence to a parametric time-transformation function is not required. Rather, prior information is used to indirectly define a multivariate prior distribution for the scale parameters at the various stress levels and the common shape parameter. Using the approach, Bayes point estimates as well as probability statements for use-stress (and accelerated) life parameters may be inferred from a host of testing scenarios. The inference procedure accommodates both the interval data sampling strategy and type I censored sampling strategy for the collection of ALT test data. The inference procedure uses the well-known Markov Chain Monte Carlo (MCMC) methods to derive posterior approximations. The approach is illustrated with an example.

Keywords: Dirichlet distribution, Environmental testing, Step-stress testing

1 Introduction

In the case of highly reliable items, e.g. Very Large Scale Integrated (VLSI) electronic devices, computer equipment, missiles, etc., mean times to failure (MTTF) exceeding a year is not uncommon. The use of these items, however, may still require reliability demonstration or verification testing,

*Corresponding author. Tel: 1-202-994-7424,
fax: 1-202-994-0245, Email address: mazzu@gwu.edu

especially when these items are used for military or high risk public applications. With such MTTF's, it is often too time consuming and too costly to test these items in their use (or nominal) environment, as the length of time to generate a reasonable number of failures is often intolerable. If such is the case, it has become a standard procedure [1] to test these items under more severe environments than experienced in actual use. Such tests are often referred to as Accelerated Life Tests (ALT's). It is noted, [2], that because of advancement in technology and increased reliability, ALT's are performed more frequently than ordinary life tests. There are two main problems associated with ALT's as: (1) optimal design of the ALT, and (2) statistical inference from ALT failure data.

The focus of this paper is on the statistical inference problem, i.e. on how to make inference about the reliability in the use environment by obtaining information in the accelerated environments. Typically inference methods have been developed assuming that: (1) the life time distribution in a constant stress environment belongs to a common family of distributions, and (2) the scale parameter of such a distribution is related to the stress environment via a parametric function known as a time transformation function (TTF) [3]. In addition, most of the inference methods are based on the use of maximum likelihood estimation which may require large sample sizes for meaningful statistical ALT inference.

In this paper, only the first assumption will be adhered to. Specifically, inference will be developed using the Weibull failure time model. The inference method is Bayesian in nature and will rely on the use of engineering judgment to specify prior distributions for the Weibull model parameters. While there is a host of literature in this area, for example [4-7], the only Bayesian inference procedure developed for the Weibull model that we know of is presented in Mazzuchi et al [8] for constant stress ALTs in conjunction with the parametric TTF. The inference procedure herein will be developed for a wide range of ALT scenarios with no TTF assumption. There has been a continued interest on the topic of comparison of ALT designs [9-13]. It is hoped that this unified framework can be used to provide further insight.

In Section 2, the general likelihood model is developed. In Section 3 the prior distribution for the shape parameter and scale parameters of the Weibull failure time model is outlined. The posterior inference is briefly discussed in Section 4. The approach is illustrated by an example in Section 5.

2 A General Likelihood Model

2.1 Motivation

A first step in any statistical inference procedure, whether classical or Bayesian, involves developing the likelihood. The flexibility of the likelihood formulation drives the flexibility of the statistical inference procedure in terms of its applicability to different ALT scenarios. In this section, a likelihood model is developed that allows for a comprehensive representation of most ALT inference scenarios currently available to ALT practitioners, specifically, regular life testing, fixed-stress testing, and progressive step-stress testing. In addition, the likelihood model allows for profile step-stress testing. The likelihood is developed with greatest degree of flexibility, allowing for different patterns for each test item as illustrated in Fig. 1.

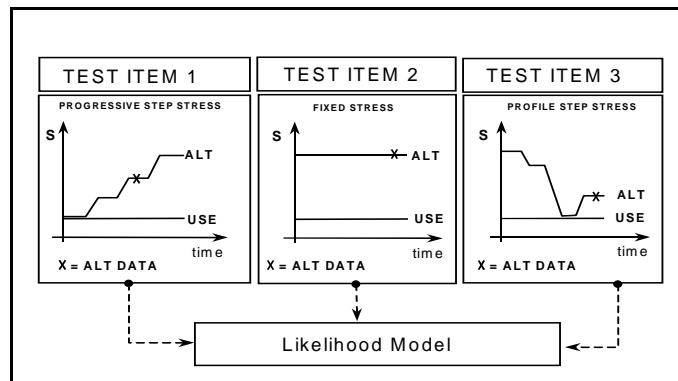


Fig. 1. A separate ALT design for each test item.

Having such a flexible formulation of a likelihood model allows for the comparison of different ALT designs within a common modeling framework. In addition, allowing for such a flexibility will increase the model's ability to represent ALT designs used by testing practitioners.

2.2 The Failure Rate Over the Course of an ALT

In developing a likelihood model, consider the following step-stress ALT setup. The ALT will consist of testing over a predetermined and fixed maximum number of test environments. An environment is defined by a combination of stress levels from the set of stress variables, e.g. temperature, vibration and voltage. Let K environments E_1, \dots, E_K be defined candidate test environments. Let E_ϵ denote the *use* environment, where $\epsilon \in \{1, \dots, K\}$. The index e will be used to indicate a particular environment. Suppose that each of N test items will be subjected to a step-stress ALT with possibly a different step pattern per test item. The index j will be used to indicate a particular test item. The total length of each ALT may vary per test item, but each ALT will be subdivided into m steps. The index i will be used to indicate a particular step-interval within an ALT. Thus, for each test item j , m steps are defined by

$$0 \equiv t_{0,j} < t_{1,j} < \dots < t_{m-1,j} < t_{m,j}$$

where the i -th step is defined as $[t_{i-1,j}, t_{i,j})$ and the ALT is terminated at time $t_{m,j}$ for test item j . A design matrix $A = \{a_{i,j}\}$ specifies the indices of the environments for each test item j in each step i . Thus during the i -th step, test item j is subjected to environment $E_{a_{i,j}}$ where $a_{i,j} = 1, \dots, K$. Note that this flexible formulation includes both regular life testing ($a_{i,j} \equiv \epsilon$ for all i) and fixed-stress ALT ($a_{i,j} \equiv z$ for all i and some particular environment E_z).

The approach to deriving the likelihood will be general and center around the failure rate, $\lambda_e(t)$, in a constant stress environment E_e . The failure rate for test item j over the course of the step-stress ALT, denoted by $h_j(t)$, is different from the failure rates in the constant stress environments, as the environments, and thus the failure behavior, vary over the course of the ALT stage. A generic expression will be derived for the failure rate $h_j(t)$ of test item j over the course of an ALT stage, conditioned on knowing the failure rate functions $\lambda_e(t)$ in the candidate test environments E_e , $e = 1, \dots, K$.

The cumulative failure rate that test item j has accumulated up to $t_{i,j}$ in an ALT is given by

$$H_j(t_{i,j}) = \int_0^{t_{i,j}} h_j(u) du. \quad (1)$$

In a constant stress environment E_e , the cumulative failure rate would be given by

$$\Lambda_e(t_{i,j}) = \int_0^{t_{i,j}} \lambda_e(u) du. \quad (2)$$

Note that the operating environment in the ALT after $t_{i,j}$ equals $E_{a_{i+1,j}}$. It will be assumed that the change in environments at $t_{i,j}$ is instantaneous. In addition, it will be assumed that no additional failures are induced by the instantaneous change of environments $t_{i,j}$ through a shock effect.

Using (2), the cumulative hazard rate $H_j(t_{i,j})$ may be expressed using $\Lambda_{a_{i+1,j}}(t)$ for some value of t . Denoting this value t by $\tau_{i+1,j}$, and solving for $\tau_{i+1,j}$, yields

$$\tau_{i+1,j} = \Lambda_{a_{i+1,j}}^{-1}(H_j(t_{i,j})). \quad (3)$$

The time $\tau_{i+1,j}$ may be interpreted as the amount of time that would have elapsed to accumulate $H_j(t_{i,j})$ by testing in environment $E_{a_{i+1,j}}$ alone, starting at time 0 (see for example Fig. 2).

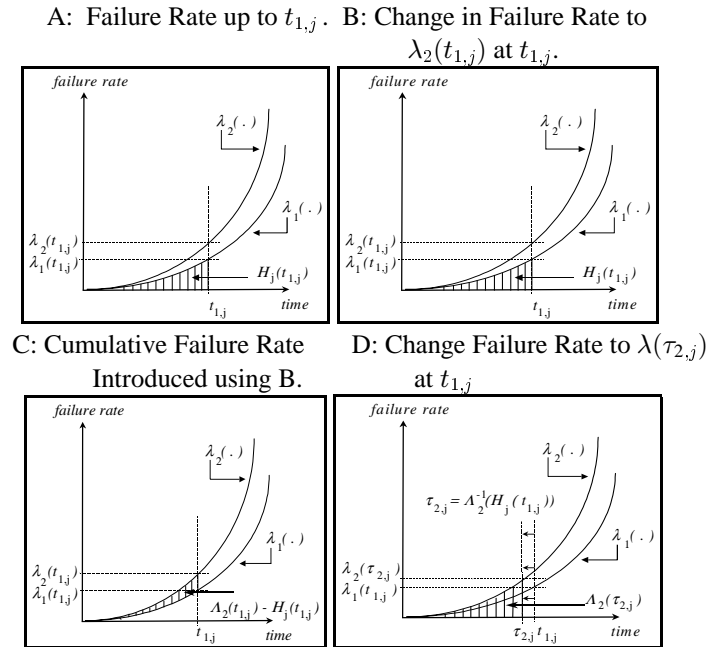


Fig. 2. Failure rate construction using instantaneous environment changes.

Next, the failure rate function over the course of the ALT stage may be derived as

$$h_j(t) = \lambda_{a_{i+1,j}}(t - t_{i,j} + \tau_{i+1,j}), \quad (4)$$

for $t_{i,j} \leq t < t_{i+1,j}$, $i = 0, \dots, m - 1$, where $\tau_{i+1,j}$ is given by (3) and $H_j(t_{0,j})$ is the initial cumulative failure rate of test item j prior to the ALT stage. In case $H_j(t_{0,j})$ is a new test item, $H_j(t_{0,j}) \equiv 0$. However, the case where a test item has a history of operating hours in known environments may be easily accommodated. The jump in the failure rate at time $t_{i,j}$ follows as

$$\Delta h_j(t_{i,j}) = h_j(t_{i,j}^+) - h_j(t_{i,j}^-), \quad (5)$$

where $h_j(t_{i,j}^-) = \lim_{t \uparrow t_{i,j}} h_j(t)$, $h_j(t_{i,j}^+) = \lim_{t \downarrow t_{i,j}} h_j(t)$. It may be derived that the jump $\Delta h_j(t_{i,j})$ equals

$$\Delta h_j(t_{i,j}) = \lambda_{a_{i+1,j}}(\tau_{i+1,j}) - \lambda_{a_i}(t_{i+1,j} - t_{i,j} + \tau_{i,j}) \quad (6)$$

for $i = 1, \dots, m - 1$. Figure 3 presents an example of the above results for a profile step stress where a Weibull failure time distribution is assumed for each constant stress.

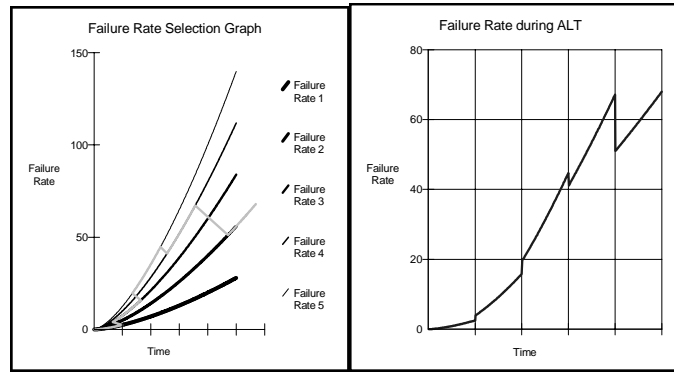


Fig. 3. Failure rate during a profile ALT with Weibull failure rate functions.

Following the approach above, the current failure rate of a test item only depends on the current accumulated cumulative failure rate and the current stress. It can be shown that the intrinsic time failure rate construction approach above is equivalent to the assumption of the Cumulated Exposure Model [3].

The assumption that no additional failures are induced by the instantaneous change of environments between steps is an assumption which may be challenged, as an instantaneous change of environments may induce a shock effect, causing item failure. The above procedure, however, can be easily extended to the case of gradual environmental changes [14].

2.3 The Likelihood Given ALT Test Data

Using the formulation of the failure rate function over the course of an ALT-stage, the likelihood given ALT Test data may be derived for both interval and Type I censored data.

2.3.1 Interval Data

Suppose failures can only be monitored at the end of a step interval $i + 1$, i.e. $[t_{i,j}, t_{i+1,j})$. The interval in which item j fails will be denoted by q_j . The probability of test item j surviving time $t_{i+1,j}$ given that it has survived up to time $t_{i,j}$ follows as

$$\begin{aligned} Pr\{T_j \geq t_{i+1,j} | T_j \geq t_{i,j}\} &= exp\left\{-\int_{t_{i,j}}^{t_{i+1,j}} h_j(u) du\right\} \\ &= exp\left\{-\int_{\tau_{i+1,j}}^{t_{i+1,j}-t_{i,j}+\tau_{i+1,j}} \lambda_{a_{i+1,j}}(v) dv\right\}, \end{aligned} \quad (7)$$

where $\tau_{i+1,j}$ is given by (3). The probability of test item j failing before time $t_{i+1,j}$ given that it has survived up to time $t_{i,j}$ equals

$$Pr\{T_j < t_{i+1,j} | T_j \geq t_{i,j}\} = 1 - exp\left\{-\int_{\tau_{i+1,j}}^{t_{i+1,j}-t_{i,j}+\tau_{i+1,j}} \lambda_{a_{i+1,j}}(v) dv\right\} \quad (8)$$

The probability of test item j failing in interval q_j equals

$$\prod_{i=1}^{q_j-1} \left\{ Pr\{T_j \geq t_{i,j} | T_j \geq t_{i-1,j}\} \times Pr\{T_j < t_{q_j,j} | T_j \geq t_{q_j-1,j}\} \right\}, \quad (9)$$

with the convention that $q_j = m + 1$ if the test item is censored at $t_{m,j}$ and $t_{m+1,j} \equiv \infty$. Substituting (7)

and (8) in (9) yields

$$\prod_{i=1}^{q_j-1} exp\left\{-\int_{\tau_{i+1,j}}^{t_{i+1,j}-t_{i,j}+\tau_{i+1,j}} \lambda_{a_{i+1,j}}(v) dv\right\} \times p(q_j), \quad (10)$$

where

$$p(q_j) = 1 - exp\left\{-\int_{\tau_{q_j,j}}^{t_{q_j,j}-t_{q_j-1,j}+\tau_{q_j,j}} \lambda_{a_{q_j,j}}(v) dv\right\} \quad (11)$$

for $q_j < m + 1$ and is defined as 1 for $q_j = m + 1$

With (10) and assuming conditional independence between the failure times of the test items conditioned on knowing $\underline{\lambda}(\cdot) = (\lambda_1(\cdot), \dots, \lambda_K(\cdot))$, it follows that the likelihood given interval data $(N, \underline{q}) = (q_1, \dots, q_N)$, equals

$$\mathcal{L}\{\underline{\lambda}(\cdot);(N, \mathbf{q})\} = \prod_{j=1}^N \prod_{i=1}^{q_j-1} \exp\left\{ - \int_{\tau_{i+1,j}}^{t_{i+1,j}-t_{i,j}+\tau_{i+1,j}} \lambda_{a_{i+1,j}}(v) dv \right\} \times p(q_j) \quad (12)$$

where N is the number of test items in the ALT. Though not specifically developed here, the previous equations may also be adjusted for the case where items begin the ALT with accumulated damage as in the case of retesting of items [14].

To be able to perform inference with respect to the failure rates $\lambda_e(t)$ in each environment, it is convenient to reorder the product in (12) as a product over the environment index e instead of over the step interval index i . Given $\tau_{i,j}$ $i = 1, \dots, m - 1$ via (3), such a reordering is possible. To accomplish such a formulation, let

$n_{e,j}$ = the number of times that test item j visits environment E_e during an ALT stage,

$v_{e,j}^k$ = interval index for which item j visits E_e for the k -th time.

With the above notation (12), may be rewritten as

$$\mathcal{L}\{\underline{\lambda}(\cdot);(N, \mathbf{q})\} = \prod_{e=1}^K \prod_{j=1}^N \prod_{k=1}^{n_{e,j}} f(e, j, k | \underline{\lambda}(\cdot), \mathbf{q}), \quad (13)$$

where

$$f(e, j, k | \underline{\lambda}(\cdot), \mathbf{q}) = \begin{cases} f_1(e, j, v_{e,j}^k | \underline{\lambda}(\cdot)) & v_{e,j}^k < q_j \\ f_2(e, j, v_{e,j}^k | \underline{\lambda}(\cdot)) & v_{e,j}^k = q_j \end{cases}, \quad (14)$$

and

$$f_1(e, j, v_e | \underline{\lambda}(\cdot)) = \exp\left\{ - \int_{\tau_{v_e,j}}^{t_{v_e,j}-t_{v_e-1,j}+\tau_{v_e,j}} \lambda_e(v) dv \right\}, \quad (15)$$

and $f_2(e, j, v_e | \underline{\lambda}(\cdot)) = 1 - f_1(e, j, v_e | \underline{\lambda}(\cdot))$ where $\tau_{i,j}$ is given by (3). Note that, f_1 (f_2) is the conditional probability of surviving the step (failing in the step) interval for which test item j visits environment E_e for the k -th time, conditioned on having survived up to the beginning of that step. When assuming a common family of life time distributions within a constant stress environment, i.e. specifying a functional form for $\underline{\lambda}(\cdot)$, the likelihood may be further derived using (13) - (15).

The interval data sampling strategy has the disadvantage that failure information is lost by only monitoring at the end of each step interval. In the type I censored sampling strategy, test items are continuously monitored over the course of the ALT.

2.3.2 Type I Censored Data

Suppose failures can be monitored continuously over the course of an ALT stage. In that case, the failure time r_j of test item j is known exactly if the test item fails in $[0, t_{m,j})$. It will be assumed that once an item has failed, it will be removed from testing in the same ALT Stage. Knowing the failure times r_j , the step intervals q_j in which the items failed may be easily derived.

Using an analogous approach as in Section 2.3.1, the likelihood given the data $(N, \underline{r}, \underline{q})$, where $\underline{r} = (r_1, \dots, r_N)$, and $\underline{q} = (q_1, \dots, q_N)$, follows as specified in the expressions (17) - (20),

$$\mathcal{L}\{\underline{\lambda}(\cdot); (N, \underline{r}, \underline{q})\} = \prod_{e=1}^K \prod_{j=1}^N \prod_{k=1}^{n_{e,j}} g(e, j, k | \underline{\lambda}(\cdot), \underline{r}, \underline{q}), \quad (17)$$

$$g(e, j, k | \underline{\lambda}(\cdot), \underline{r}, \underline{q}) = \begin{cases} g_1(e, j, v_{e,j}^k | \underline{\lambda}(\cdot), \underline{r}) & v_{e,j}^k < q_j \\ g_2(e, j, v_{e,j}^k | \underline{\lambda}(\cdot), \underline{r}) & v_{e,j}^k = q_j, \end{cases} \quad (18)$$

$$g_1(e, j, v_e | \underline{\lambda}(\cdot), \underline{r}) = \exp\left\{-\int_{\tau_{v_e,j}}^{t_{v_e,j}-t_{v_e-1,j}+\tau_{v_e,j}} \lambda_e(v) dv\right\}, \quad (19)$$

$$g_2(e, j, v_e | \underline{\lambda}(\cdot), \underline{r}) = \exp\left\{-\int_{\tau_{v_e,j}}^{r_j-t_{v_e-1,j}+\tau_{v_e,j}} \lambda_e(v) dv\right\} h_j(r_j). \quad (20)$$

Note that, g_1 is the conditional probability of surviving the step interval for which test item j visits environment E_e for the k -th time conditioned on having survived up to the beginning of that step. In addition, note that g_2 is the conditional density at the time of failure in case the test item fails within the step interval for which test item j visits environment E_e for the k -th time conditioned on having survived up to the beginning of that step.

When assuming a common family of life time distributions within constant environments, i.e., specifying a functional form for $\underline{\lambda}(\cdot)$, the likelihood may be further derived using (17) - (20). Such expressions can be derived for the Weibull life distribution using $\lambda_e(t) = \lambda_e \beta t^{\beta-1}$.

3 Prior Distribution

Given the ordering of the severity of the testing environments, it is natural to assume that

$$0 \equiv \lambda_0 < \lambda_1 < \dots < \lambda_K < \lambda_{K+1} \equiv \infty, \quad (21)$$

and, defining

$$u_e = e^{-c\lambda_e} \quad (22)$$

for some constant c , it follows that

$$0 \equiv u_{K+1} < u_K < \dots < u_1 < u_0 \equiv 1. \quad (23)$$

The parameter c is chosen to insure numerical stability of the results [15]. Rather than defining a prior distribution for $\underline{\lambda}$ exhibiting property (21), one may equivalently define a prior for $\underline{u} = (u_1, \dots, u_K)$ exhibiting property (23). Concentrating on $\underline{u} = (u_1, \dots, u_K)$, a prior distribution which is mathematically tractable, is defined over the region specified in (23), and imposes no other unnecessary restrictions on the u_e , is the multivariate Ordered Dirichlet distribution,

$$\Pi\{\underline{u} \mid \eta, \underline{\nu}\} = \frac{\prod_{e=1}^{K+1} (u_{e-1} - u_e)^{\eta \cdot \nu_e - 1}}{\mathbb{D}(\eta, \underline{\nu})}, \quad (24)$$

where, $\eta > 0$, $\nu_e > 0$, $e = 1, \dots, K + 1$, and

$$\mathbb{D}(\eta, \underline{\nu}) = \frac{\prod_{e=1}^{K+1} \Gamma(\eta \cdot \nu_e)}{\Gamma(\eta \cdot)}, \quad \sum_{e=1}^{K+1} \nu_e = 1. \quad (25)$$

Analogous to the above a beta prior distribution is specified for the transformed parameter $b = e^{-\beta}$.

$$\Pi\{b \mid \gamma, \kappa\} = \frac{(b)^{\kappa \cdot \gamma - 1} (1 - b)^{\kappa \cdot (1 - \gamma) - 1}}{\mathbb{B}(\kappa \cdot \gamma, \kappa \cdot (1 - \gamma))}. \quad (26)$$

The prior distribution of b is assumed independent of the prior distribution of \underline{u} .

Typically, to define the prior parameters, expert judgment concerning quantities of interest are elicited and equated to their theoretical expression for central tendency such as mean, median, or mode [16]. In addition, some quantification of the quality of the expert judgment is often given by specifying a variance or a probability interval for the prior quantity. Solving these equations generally leads to the desired parameter estimates. Specific quantities of interest for the problem at hand are the mission time reliabilities for each stress environment.

An additional advantage of the Ordered Dirichlet distribution is that due to its mathematical properties, the incorporation of expert judgment is facilitated. From (24), for example, the prior marginal distribution for any u_e is obtained as a beta distribution given by

$$\Pi\{u_e\} = \frac{(u_e)^{\eta \cdot (1 - \nu_{e\bullet}) - 1} (1 - u_e)^{\eta \cdot \nu_{e\bullet} - 1}}{\mathbb{B}(\eta \cdot (1 - \nu_{e\bullet}), \eta \cdot \nu_{e\bullet})}, \quad (27)$$

where $\mathbb{B}(\cdot, \cdot)$ is the well known beta constant. This distribution can be used to make prior probability statements concerning mission time reliabilities at the different stress levels due to the one-to-one relationships of these quantities to u_e . Specifically,

$$\{R(t)|u_e, \beta\} = Pr\{X > t | u_e, \beta\} = (u_e)^{\frac{t\beta}{c}}, \quad (28)$$

where $\{R(t)|u_e, \beta\}$ is the reliability of a test item exposed to environment E_e for a mission time t given u_e .

To obtain the prior parameter values, estimates of prior mission time reliabilities must be obtained. The focus is on mission time reliabilities rather than failure rates, as these may more easily be obtained through elicitation methods focussing on observable quantities. Specifically, for a specified mission length, an estimate of R_e^* the mission time reliability in environment e , a quantile estimate R_e^L for the mission reliability at use stress, and an estimate of R_e° mission reliability after G mission time durations at use stress is required. Given this information, the following problem is solved numerically to obtain the prior parameter estimates [14]:

Solve $\Theta = (c, \eta, \nu, \gamma, \kappa)$ *from*

1. $Pr\{R_e(t) \leq R_e^* | \Theta\} = 0.50$
2. $Pr\{R_e(G \cdot t) \leq R_e^\circ | \Theta\} = 0.50$
3. $Pr\{R_e(t) \leq R_e^L | \Theta\} = 1 - q, q = 0.95$
4. $Pr\{R_e(t) \leq R_e^* | \Theta\} = 0.50, e = 1, \dots, K, e \neq \epsilon$

Thus with the exception of the quantile estimate, all prior reliability estimates are treated as median values.

4 Posterior Approximation

The expression for the likelihood given ALT data was derived in Section 2 and resulted in expressions for interval and expressions for type I censored data. Rather than performing prior-posterior analysis using these expressions, one may perform prior-posterior analysis by expressing likelihood in terms of \underline{u} and b instead of $\underline{\lambda}$ and β using (22) and using well known properties of the Ordered Dirichlet distribution.

The posterior distribution follows for interval data and type I censored data by applying Bayes Theorem to the prior and the appropriate likelihood expressions. The derivation of the posterior distribution is intractable in most cases. It is therefore suggested to use the well known Markov Chain Monte Carlo (MCMC) method approach [17]. Through the MCMC approach, a sample of the posterior distribution can be obtained. From the sample, approximations of moments and an approximation of the joint posterior distribution may be derived. The approximations of marginal posterior distributions and, using (28), that of the mission time reliability at any stress level may be derived by the estimation of their quantiles. These quantiles may be estimated up to a desired level of accuracy using order statistics arguments [18].

5 Example

The following example is designed to show the flexibility of the Weibull ALT inference model. The use stress environment will be E_2 and different test items will be subjected to different step patterns. Assume that the following median mission time reliability estimates are available for a mission time of 1000 hours.

$$R_1^* = 0.9; R_2^* = 0.8; R_3^* = 0.7; R_4^* = 0.6; R_5^* = 0.5; R_2^L = 0.4; R_2^o = 0.2; G = 2,$$

An approximate solution to the prior parameters may be solved from the above data and follow as

$$c = 2917399.332; \eta = 747.06;$$

$$\nu_1 = 0.2110; \nu_2 = 0.1833; \nu_3 = 0.1568;$$

$$\nu_4 = 0.1312; \nu_5 = 0.1065; \nu_6 = 0.2110; \kappa = 472.74, \gamma = 0.1308.$$

In this example, 6 proof-systems are available for testing. The step data concerning environments in each step and step interval times are specified for each testing stage, f , by the matrices A^f and T^f below

$$A^1 = \begin{pmatrix} 1 & 2 & 3 & 4 & 5 \\ 1 & 2 & 3 & 4 & 5 \\ 5 & 4 & 3 & 2 & 1 \\ 5 & 4 & 3 & 2 & 1 \\ 1 & 3 & 5 & 4 & 2 \\ 1 & 3 & 5 & 4 & 2 \end{pmatrix}, T^1 = \begin{pmatrix} 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \end{pmatrix},$$

$$A^2 = \begin{pmatrix} 1 & 3 & 5 & 4 & 2 \\ 1 & 3 & 5 & 4 & 2 \\ 1 & 2 & 3 & 4 & 5 \\ 1 & 2 & 3 & 4 & 5 \\ 5 & 4 & 3 & 2 & 1 \\ 5 & 4 & 3 & 2 & 1 \end{pmatrix}, T^2 = \begin{pmatrix} 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \\ 100 & 100 & 100 & 100 & 100 \end{pmatrix}$$

In the second testing stage, failed items from the first stage are assumed minimally repaired. Items that survive the first stage are continued on test in the second stage.

The mission-time of the system was set to 1000 hours. The test results over the ALT are summarized in terms of \underline{r}^f , \underline{q}^f in Table 1. Note that $q_j^f = 6$ indicates that the test item has survived the ALT stage without failure.

Table 1

ALT test data in terms of \underline{r}^f , \underline{q}^f , \underline{s}^f

<i>Test Item</i>		1	2	3	4	5	6
<i>ALT Stage 1</i>	r_j^1	495	500	295	500	395	500
	q_j^1	5	6	3	6	4	6
<i>ALT Stage 2</i>	r_j^2	295	95	500	195	500	295
	q_j^2	3	1	6	2	6	3

A prior-posterior analysis for both interval data and type I censored data is presented. The Gibbs Sampling Method was used to obtain posterior quantile estimates using test data obtained over 2 ALT stages for: (1) the scale parameters in each environment, and (2) the common shape parameter. The length of the Gibbs-Sequence generated was of length 100,000 and the Gibbs burn-in\Gibbs lag period was set to 25. MCMC diagnostics for this problem are discussed in van Dorp et al [19]. Results are provided in Table 2.

Table 2
 Prior and posterior parameter estimates

E_e	Prior λ_e^*	Posterior λ_e^*	
		Interval Data	Type I Censored Data
1	$8.11 \cdot 10^{-8}$	$8.22 \cdot 10^{-8}$	$8.18 \cdot 10^{-8}$
.2	$1.72 \cdot 10^{-7}$	$1.73 \cdot 10^{-7}$	$1.73 \cdot 10^{-7}$
3	$2.75 \cdot 10^{-7}$	$2.77 \cdot 10^{-7}$	$2.76 \cdot 10^{-7}$
4	$3.93 \cdot 10^{-7}$	$3.95 \cdot 10^{-7}$	$3.95 \cdot 10^{-7}$
5	$5.34 \cdot 10^{-7}$	$5.36 \cdot 10^{-7}$	$5.36 \cdot 10^{-7}$
β^*	2.03	2.33	2.32

Distributional result may also be obtained. For example, Figs. 4 and 5 covers the prior and posterior distribution for the shape and use stress scale parameter for the interval censoring case. Distributional results for the scale parameter or mission time reliability (for any specified mission time) at any stress level may also be produced. It follows from Figs. 4 and 5 that for this particular example, the greatest shift is observed in the distribution of the shape parameter rather than that of the scale parameter.

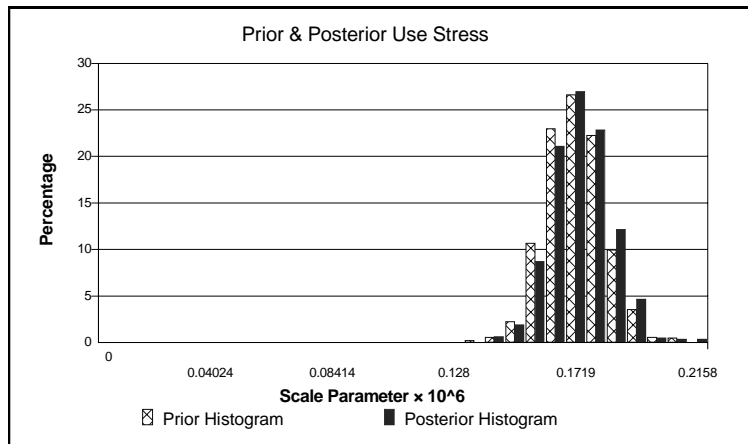


Fig. 4. Prior and posterior scale parameter for environment 2 - interval data.

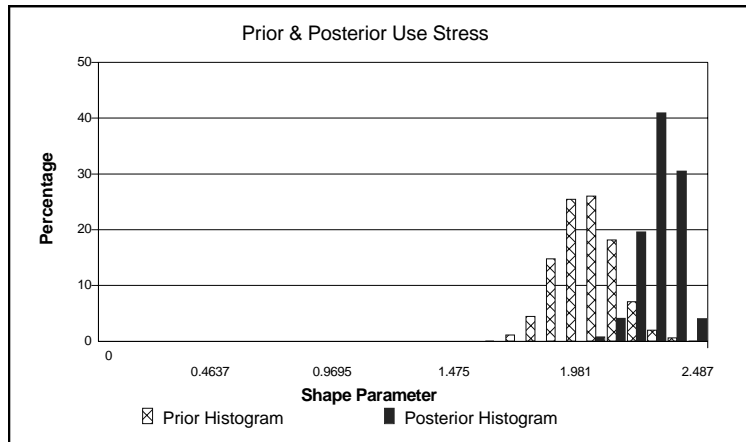


Fig. 5. Prior and posterior shape parameter - interval data.

REFERENCES

- [1] Department of Defense Mil-Std-781C. Reliability design qualification and production acceptance tests: exponential case. United States Government Printing Office.
- [2] Mann, NR, Singpurwalla, ND. Life testing. Encyclopedia of statistical sciences 1983;4:632- 639. John Wiley & Sons.
- [3] Nelson, W. Accelerated testing: statistical models, test plans, and data analyses. USA: John Wiley & Sons, 1990.
- [4] Madi, MT. Multiple step-stress accelerated life tests: the tampered failure rate model. Communications in Statistics-Theory and Methods 1993; 22(9):2631-2639.
- [5] Bai, DS, Chun, YR, Cha, MS. Time-censored ramp tests with stress bound for Weibull life distribution. IEEE Transactions on Reliability 1997;46(1):99-107.
- [6] Khamis, IH, Higgins, JJ. An alternative to the Weibull step-stress model. International Journal of Quality & Reliability Management 1999;16(2):158-165.
- [7] Abdel-Ghaly, AA, Attia, AF, Abdel-Ghani MM. The maximum likelihood estimates in step partially accelerated life tests for the Weibull parameters in censored data. Communications in Statistics-Theory and Methods 2002;31(4):551-573.

- [8] Mazzuchi, TA, Soyer, R, Vopatek, A. Linear Bayesian inference for accelerated Weibull model. *Lifetime Data Analysis* 1997;3:63-75.
- [9] Trujillo, H, Bonat, E. Improvements in step stress tests. *Microelectronics Reliability* 1989;29(5): 701-703.
- [10] Meeker, WQ, Escobar, LA. A review of recent research and current issues in accelerated testing. *International Statistical Review* 1993;61(1):147-168.
- [11] Khamis, IH. Comparison between constant and step-stress tests for Weibull models. *International Journal of Quality & Reliability Management* 1997;14(1):74-81.
- [12] McLinn, JA. Ways to improve the analysis of multi-level accelerated life testing. *Quality and Reliability Engineering International* 1998;14(6):393-401.
- [13] McSorley, EO, Lu, JC, Li, CS. Performance of parameter-estimates in step-stress accelerated life-test with various sample-sizes. *IEEE Transactions on Reliability* 2002;51(3):271-277.
- [14] Van Dorp, JR. A general Bayesian inference model for accelerated life testing. Doctoral Dissertation, The George Washington University, Washington DC, 1998.
- [15] Van Dorp, JR, Mazzuchi, TA, Fornell, GE, Pollock, LR. A Bayes approach to step-stress accelerated life testing. *IEEE Transactions on Reliability* 1996;45:491-498.
- [16] Cooke, RM. *Experts in uncertainty*. Great Britan: Oxford University Press, 1991.
- [17] Casella, G, George, EI. Explaining the Gibbs sampler. *The American Statistician* 1992;46:167-174.
- [18] Mood, AM, Graybill, FA, Boes, DC. *Introduction to the theory of statistics*, 3rd Edition. USA: McGraw-Hill International Editions, 1974.
- [19] Van Dorp, JR, Mazzuchi, TA. A general Bayes exponential inference model for accelerated life testing. *Journal of Statistical Planning and Inference* 2004;119:55-74.